


AT-300

	+20	+25	
	AT-3		
	BT	H	C
	-50		
	±0.1		
	≤2		
	±2		
	1.3 /min		
	0.75 /min		
	≤70dB A		
x x mm	300L		
	1200		
	500		
	500		
	1450		
x x mm	1000		
	1600		
	SUS304		
	+		
	R404A/R23		
	LED		
	/		
120	100		IP
	PT100		
-90.0	200.0	-90.0	300.0
	USB/RS-232/RS-485		±0.2
	1	1	1
		2	4
	0	30	0
	AC 380		1±10% V
			50±0.5 Hz

▲可增加湿度控制

产品细节 Product Details

Product Details

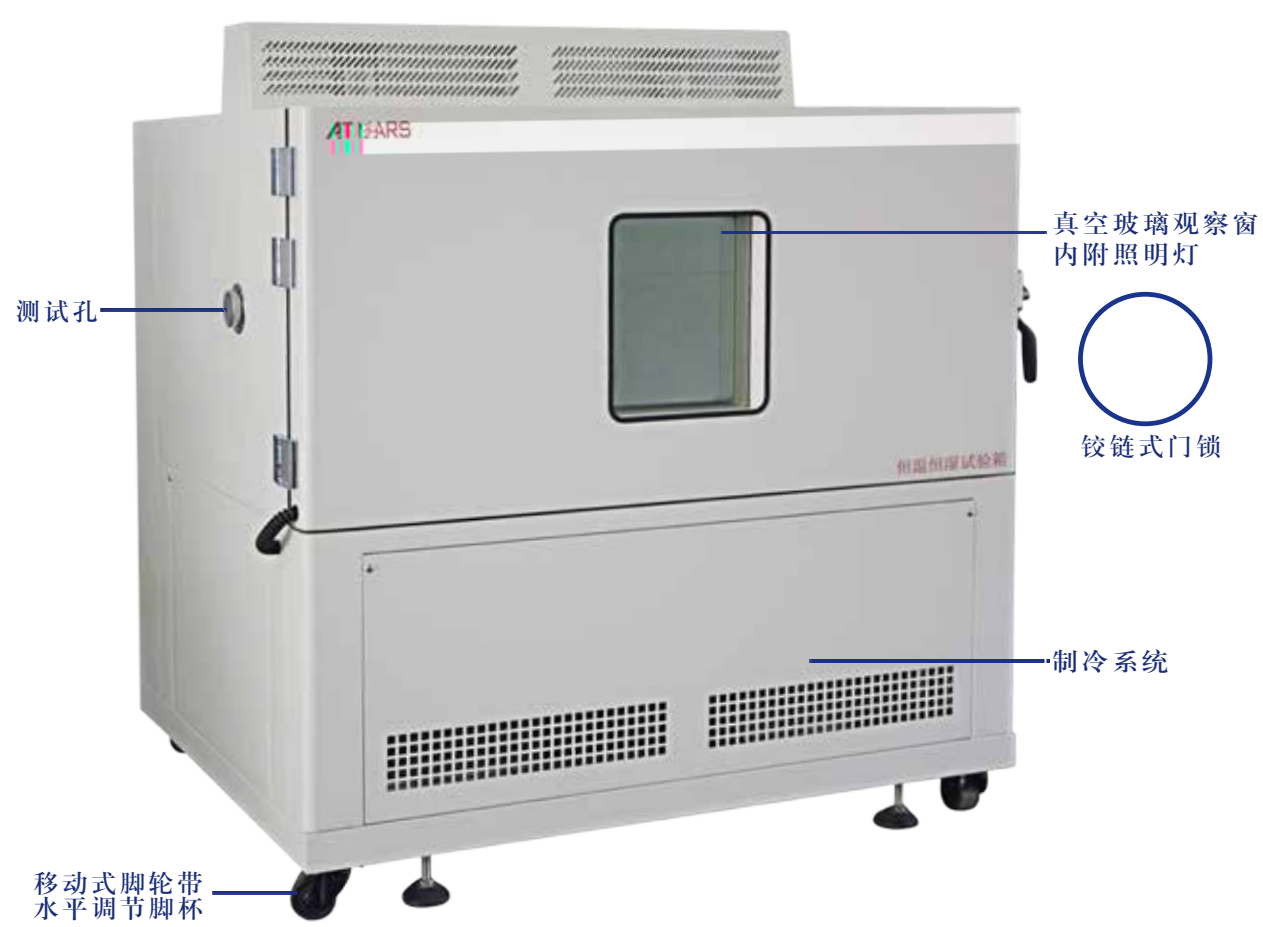

- [1] SUS304#
- [2] 100mm
- [3] 400x 600mm
- [4] 100 50 1 ()
- [5] 1
- [6] 1/2
- [7] 1

- [1] 7 LED 800x 480
- [2] /
- [3] PT100
- [4] PID /2 4-20mA /16 ()
- [5] 8 IS /8 T /4 AL
- [6] 16 □
- [7] -50 +150 -90.00 -300.00 ± 0.2
- [8] RS232/RS485 1.2km
- [9] /
- [10] NOT, AND, OR, NOR, XOR PLC
- [11] ->
- [12] 120 -> 100
- [13] IP
- [14]

系统特点 System Features

System Features

- [1] R404A
- [2] SSR
- [3] ePTFE
- [4] 1 2 3 4 5 6
- [5] 100 50 () x 1
- [6] x 1
- [7] 1 2 3 4 5 6

实拍图 Real Shot



试验设备 力学试验设备 实验室

质量管理体系认证证书

中华人民共和国国家版权局 计算机软件著作权登记证书

中华人民共和国国家知识产权局 实用新型专利证书

ZL 2017 2 0229837.2 ZL 2017 2 0219968.2 ZL 2017 2 0208862.2 ZL 2017 2 0208862.X

